

## High Performance LED Visual Alerter for Event Notification

The Algo 1127 Visual Alerter is an attractive high performing light that provides visual indication of in-use, ringing, message waiting and ACD caller in queue.

Supported telephones include: SIP, Nortel digital and IP Phones, IP Softphone 2050, Meridian Digital Centrex, and analog. Constructed with 18 high-intensity LEDs, the 1127 provides a softly diffused light that is highly visible in all directions. Relay inputs on the 1127 also permit activation via dry contact closure for a variety of other applications requiring visual indication.

The Visual Alerter can be located on a desktop, cubicle wall, above a computer monitor, or hard wired in a wall or ceiling-mount application. Featuring four user-selectable flash patterns, the 1127 is offered in three different colors (green, blue, and red).



### Typical Applications

#### Visual indication of a headset user on a call:

- > Receptionists
- > Call center agents
- > Employees in a cubicle environment

#### Visual ring indication:

- > Night clubs
- > Hospitals
- > Recording studios

#### Visual message waiting indication:


- > Retail
- > Schools
- > Floor supervisors

#### ACD queue activity:\*

- > Visual indication of caller in queue
- > Visual indication of time parameter exceeded while in queue

\* Contact Algo for AuxBox special requirements.

### Typical Connection Options

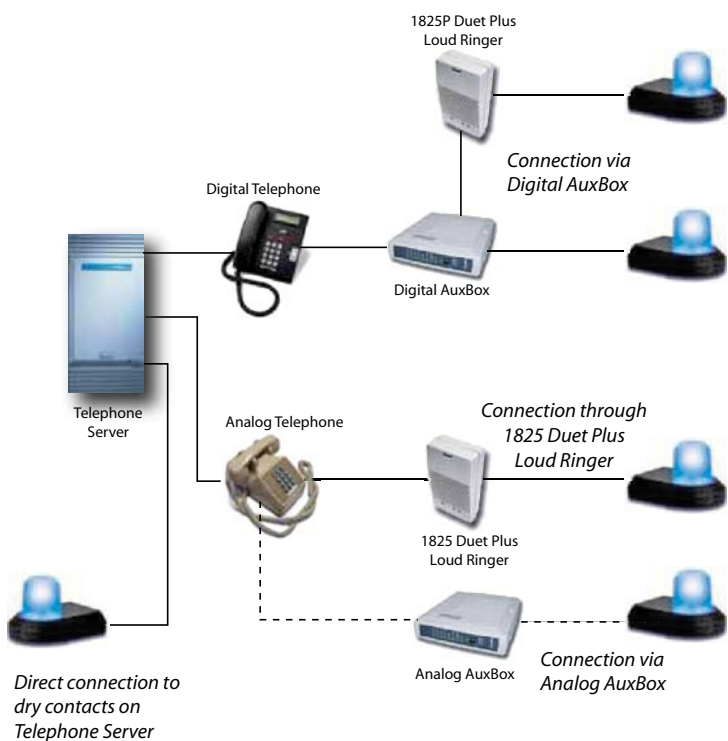

## Ordering Information

1127R	Visual Indicator (red) without power supply
1127B	Visual Indicator (blue) without power supply
1127G	Visual Indicator (green) without power supply
1127PR	Visual Indicator (red) with power supply NA (117V 60Hz input 24Vdc 200mA output)
1127PB	Visual Indicator (blue) with power supply NA (117V 60Hz input 24Vdc 200mA output)
1127PG	Visual Indicator (green) with power supply NA (117V 60Hz input 24Vdc 200mA output)

Please contact Algo for ordering information outside of North America.

## Specifications

LED output	18 high intensity low dispersion angle LEDs diffused
Plug & Play connectors	2.1 mm ID jack input for power, 24 Vdc 80 mA polarity independent 2.5 mm jack input for dry contact closure
Terminal connections	Power, signal (dry contact or AUX SPKR from 1825 Duet Plus)
Maximum wire distance	1,000 feet (300 m) using 24 gauge wire for remote power
Dry contact detection	15 kOhms max, 1 mA 24V resistive
Audio detection	3.3 Vrms 400-1200 Hz
Mounting	Adhesive hook & loop tape or screws (supplied)
Color options	Red, blue, and green



For industrial environments or applications where wide area visual indication is required, substitute the 1127 Visual Alerter with Algo's **1126 Strobe Light**

## Web Links / Related Products

Visit the following links for in-depth product information, including User Guides, demos, and application diagrams.

1127 Visual Alerter	<a href="http://www.algosolutions.com/1127">www.algosolutions.com/1127</a>
<b>Related Products</b>	
1126 Strobe Light	<a href="http://www.algosolutions.com/1126">www.algosolutions.com/1126</a>
1825 Loud Ringer	<a href="http://www.algosolutions.com/1825">www.algosolutions.com/1825</a>
4100 AuxBox	<a href="http://www.algosolutions.com/4100">www.algosolutions.com/4100</a>
4102 Digital AuxBox	<a href="http://www.algosolutions.com/4102">www.algosolutions.com/4102</a>
4105 Analog AuxBox	<a href="http://www.algosolutions.com/4105">www.algosolutions.com/4105</a>
5006 Centrex AuxBox	<a href="http://www.algosolutions.com/5006">www.algosolutions.com/5006</a>
8001 IP Alerter	<a href="http://www.algosolutions.com/8001">www.algosolutions.com/8001</a>
8002 LanBox	<a href="http://www.algosolutions.com/8002">www.algosolutions.com/8002</a>
8180 SIP Audio Alerter	<a href="http://www.algosolutions.com/8180">www.algosolutions.com/8180</a>

