

## Professional Quality Call Recording Solution for Home or Business

The Algo 4105 Analog AuxBox is a state-of-the-art digital call recording solution for home or small business analog phones. Ideal for capturing and managing comprehensive call information, the 4105 combines the power of a PC interface with advanced digital audio recording capability. Record automatically or on demand for easy call playback, archiving, and emailing.

### Plug-and-Play Setup

- Connects to USB port and analog telephone jack
- Easy-to-install Windows-based Software

### Detailed data capture

- Conversations recorded in high-quality WMA digital audio files
- Logs call display data, call duration, missed calls, & user-entered comment field per call record
- Captures data from multiple phones and extensions on the same line - including cordless and hands-free phones
- All call records time and date stamped

### Fast Call Record Retrieval, Sharing, and Reporting

- Find call records instantly through Sort, Search, and Advanced Query functions (by date, call duration, comment, or call type fields)
- One-click E-mail function permits easy sharing of call records
- Display statistical summary of telephone activity
- Export call record files to Excel



### Flexibility

- Automatic recording mode records all calls continuously
- Manual recording mode records calls on-demand (last unrecorded call is always retained in memory for optional "post-save")

### Typical Applications

- Transaction Evidence and Verification
- Purchasers, Traders, Sales Professionals
- Legal, Accounting, Medical, Financial Offices
- Schools
- Conference Calls
- Telephone Order Lines
- Call Centers, Customer Service, Dispatch
- Security
- Training for Self-Improvement
- Quality Monitoring

## Ordering Information

Description	Product Code
Analog AuxBox Call Recorder (includes Client Call Recorder Software CD, USB cable, telephone cord, and Installation Guide)	4105

## Specifications

Power	USB Powered Device (<100 mA)
Recording	Records digitally to PC hard drive; 3 MBytes per hour (Client Call Recorder Software default WMA encoding)
PC Requirements	Windows 2000, ME, XP, Vista; P3 450 MHz or better; available USB port; 100 MB Hard Drive space; 256 MB RAM; Sound Card, CD-ROM
Caller ID (CLID) Support	Telcordia GR-30-CORE and BT SIN 242
Message Waiting	Lamp Pulse, Stentor ID-008 and BT SIN 242
Auxiliary Output	Activated by ring, message waiting, and in-use (off-hook)
Longitudinal Balance	60 dB minimum
Input Impedance	>1 MOhm
Regulatory	FCC, CSA (US and Canada), CE, Industry Canada
USB	1.1
Cables provided	One 6 ft (1.8 m) USB cable One 6 ft (1.8 m) 2.5mm-to-2.5mm relay cord One 7 ft (2.1 m) 6-conductor telephone line cord
Dimensions	Width - 5.75" (14.5 cm) Depth - 6.75" (17.5 cm) Height - 1.5" (4.25 cm)




4105 Front Panel View



4105 Back Panel View

## Typical Connection Diagram

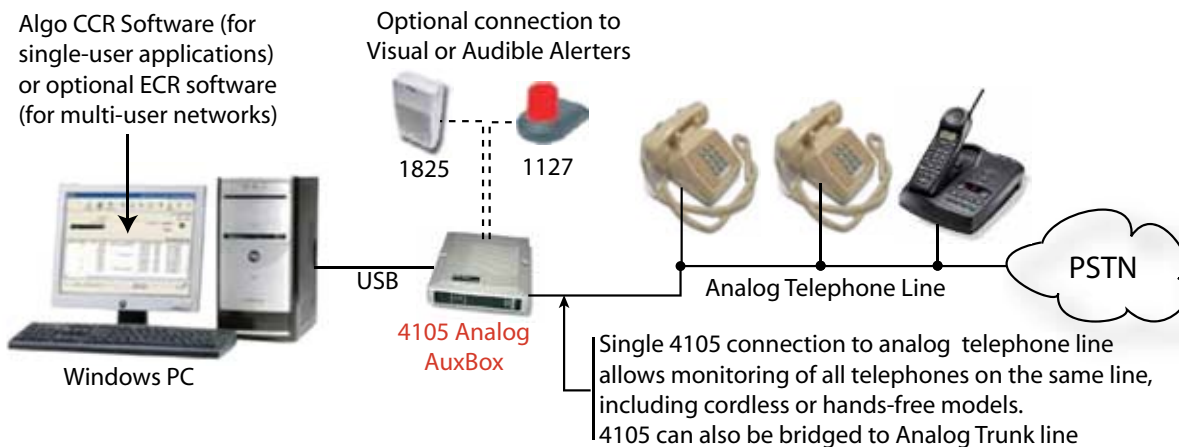

DC4105BR-11 November 2009 © Algo Communication Products Ltd. All rights reserved. Algo® is a registered trademark of Algo Communication Products Ltd. All other trademarks are the property of their respective owners.

[www.algosolutions.com](http://www.algosolutions.com)

Algo Communication Products Ltd., 4500 Beedie Street, Burnaby, BC Canada V5J 5L2

Sales & Support: 1-877-884-2546 (USA & Canada) or +1-604-454-3790; [sales@algosolutions.com](mailto:sales@algosolutions.com); [support@algosolutions.com](mailto:support@algosolutions.com)