

## Multi-User Centralized Call Recording for Nortel Digital Telephones



**The 4210 Enterprise Call Recorder (ECR) Shelf is a centralized hardware alternative to Algo's successful digital desktop call recorder, the 4102 Digital AuxBox.**

Capable of monitoring and recording up to 16 Nortel digital telephones, the 4210 ECR Shelf features modular architecture, integrated USB hub, common power supply, and industry leading software integration.

### Key Features


- Seamless integration with Algo's Enterprise Call Recorder (ECR) Software
- Scalable - monitor and record from 1 to 16 digital telephones per shelf (ECR Software supports two 4210 ECR Shelves for up to 32 digital telephones on a single server PC)
- Convenient wiring connections for telephone room cross connect interface
- Single USB interface to a server PC
- Supports key features including call display capture, in addition to automatic and telephone-activated record-on-demand



## Specifications

Compatibility	Norstar/BCM: M7100, M7208, M7310, M7324, T7100, T7208, T7316, T7406 Meridian 1 / CS 1000: M2006, M2008, M2216, M2250, M2616 M3901, M3902, M3903, M3904, M3905
Shelf Capacity	Up to 16 x 4102R Digital AuxCards (require one per telephone except M2250 which requires two Digital AuxCards if Call Display required)
ECR Software Capacity	Up to 32 telephones (2 fully loaded 4210 ECR Shelves or distributed AuxBox desktop recorders - 4102, 4105, 5006)
Recommended Server PC (for 32 telephones)	Windows® XP Pro; Intel® Core™2 Duo Processor (2.40 GHz / 1 GB RAM) or Dual Core Intel® Xeon® Processor (2.40 GHz / 1 GB RAM)
Wiring	Single USB Port for connection to server PC; 25 pr male amphenol connector for telephone connections (Maximum recommended bridge tap 15 ft (4.5 m)); 25 pr male amphenol connector for auxiliary relay outputs; Single DIN Power input connector
Auxiliary Relay Outputs	Maximum 50 mA / 30 V rating; Configurable for In-Use, Message Waiting, or Ring Indication with Algo 1825 Duet Plus, 1126 Strobe Light, or 1127 Visual Alerter
Includes	3U 19" Shelf, 9" depth; 16 Port USB Hub Card; Power Supply (95-265 V input 5 V / 3 A output); USB Cord 6 ft (2 m)

## Typical Connection Diagram

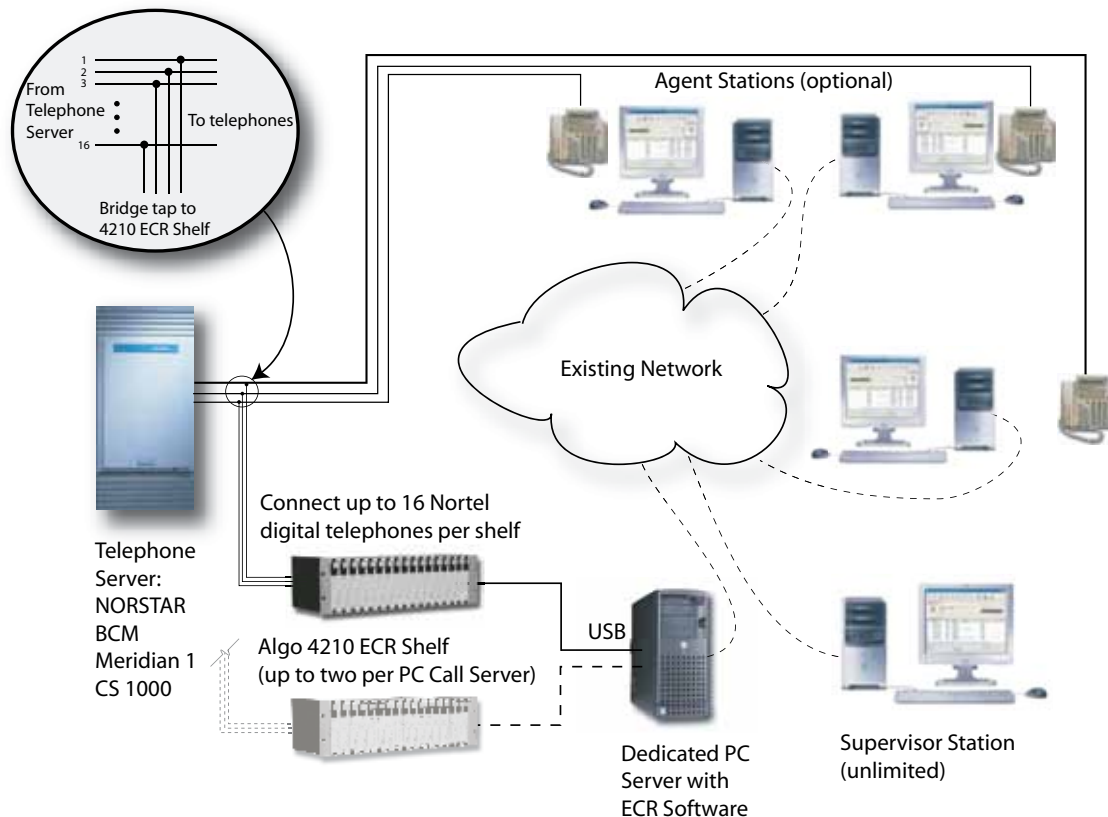

DC4210BR-09 November 2009 © Algo Communication Products Ltd. All rights reserved. Algo® is a registered trademark of Algo Communication Products Ltd. All other trademarks are the property of their respective owners.

[www.algosolutions.com](http://www.algosolutions.com)

Algo Communication Products Ltd., 4500 Beedie Street, Burnaby, BC Canada V5J 5L2

Sales & Support: 1-877-884-2546 (USA & Canada) or +1-604-454-3790; sales@algosolutions.com; support@algosolutions.com