

## M2250 Console Digital Call Recording to PC Software

Telephone conversations can be recorded from the M2250 console onto a PC hard drive using the 4102 Digital AuxBox.

A 4102 Digital AuxBox connected across the TN1 wire pair and software included with the Digital AuxBox will provide automatic or manual recording onto a PC hard drive.

A single Digital AuxBox will provide call recording; however, for capture of call display information, a second Digital AuxBox is required, connecting to the TN2 wire pair.

The 4102 Digital AuxBox includes software which provides the following features:

- Automatic or Manual recording using hot-key on console or keyboard)
- Call record storage unlimited or limited by calls, days, or memory allocation
- WAV or WMA (compressed) audio format
- User added comments to call records
- Call records can be easily emailed with call record information inserted into email message

Connecting the Digital AuxBox to the console TN1 or TN2 wire pair requires installation of RJ11 telephone jacks - one for TN1 and a second jack for TN2 if call display information is required.

### Diagram 1 Requirements


- 4102 Digital AuxBox
- Customer Supplied PC
- Windows 98SE, ME, 2000, XP
- Available USB Port

### Diagram 2 Requirements

- 2 x 4102 Digital AuxBox
- Customer Supplied PC
- Windows 98SE, ME, 2000, XP
- Available USB Port

### For M2250 Attendant Console

**Diagram 1: Voice Recording without Caller ID**

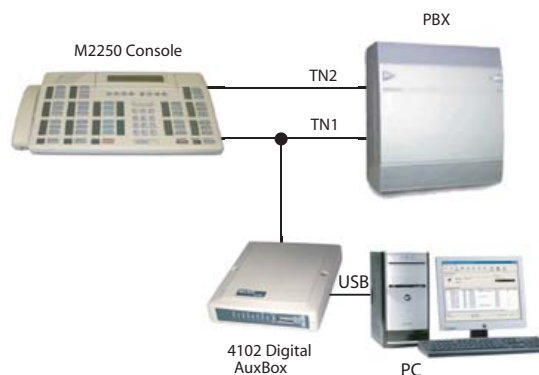

**Diagram 2: Voice Recording WITH Caller ID**

